


Sauna heater Germanius


For hotel and commercial sauna

Service friendly unit assembly system.
Optimised ratio of radiated heat and convection due to the appropriate amount of stones.


9 kW

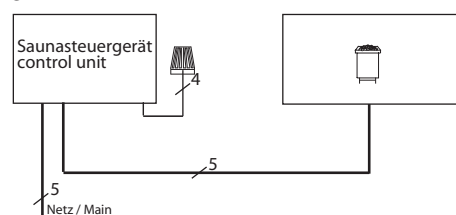

12 - 15 kW

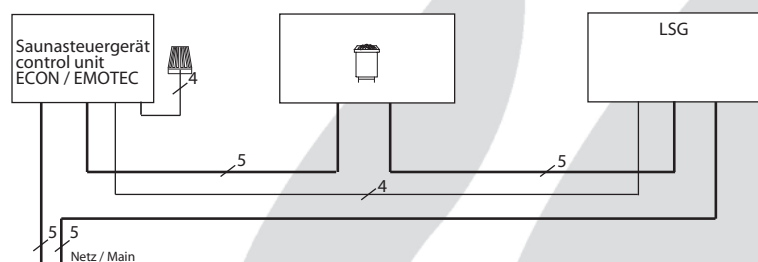

18 kW

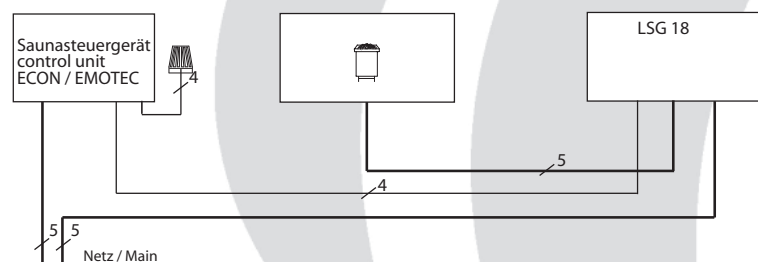

Capacity acc. DIN	Electrical. Connection	Fuse control unit in A	Fuse LSG in A	Connecting cable main - control unit in mm²	Connecting cable main - LSG in mm²	Connecting cable control unit - heater in mm²	Connecting cable LSG - heater in mm²	Connecting cable control unit - LSG in mm²
9 kW	3N AC 50 Hz 400 V	3 x 16		5 x 2,5		5 x 1,5		
12 kW			3 x 16		5 x 2,5		5 x 1,5	4 x 1,5
15 kW					5 x 6			
18 kW			3 x 35				5 x 6	

All cross sections of a line are minimum diameters in mm² (Copper line)


Art.-No.	Outer shell	Capacity acc. DIN	Installation dimensions H/W/D mm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Power switch gear needed	For operation with control units
94.3930	anthracite pearl effect vision panel in the lower part	9 kW	925 x 620 x 510	10 - 14 m³	35 x 6 cm	ca. 51 kg	60 kg	no	ECON D1 ECON D2 ECON H1 ECON H2 EMOTEC DC9000 EMOTEC DC9000 DB/DL/DLF EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL/DLF EmoTouch II PB/AF/GF
94.3931		12 kW		14 - 18 m³	35 x 7 cm			ECON 45L09 EMOTEC L09	
94.3932		15 kW		18 - 25 m³	35 x 9 cm				
94.3933		18 kW		24 - 30 m³	35 x 11 cm			LSG 18	

Free standing heater




MADE IN GERMANY

Installation dimensions for type 9 to 15 kW



Installation dimensions for type 18 kW



Subject to technical modifications

